



16" MANWAY OPENING  
WITH BOLT ON LID

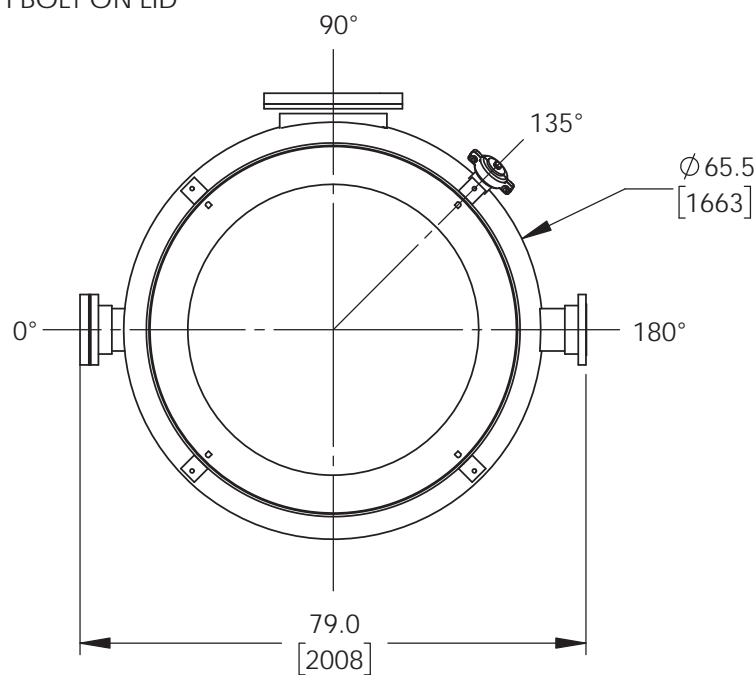


**BOTTOM VIEW**

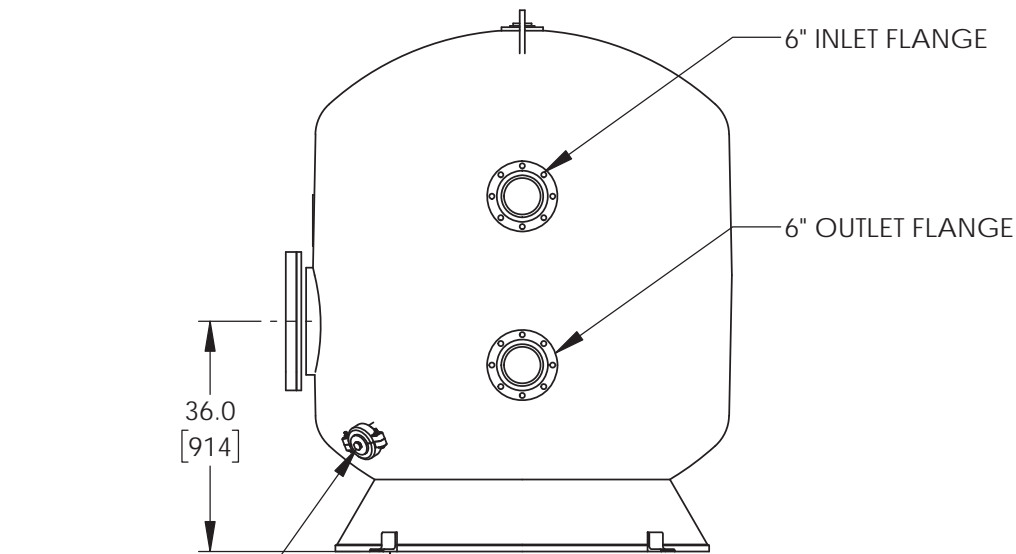

DRAIN 3"  
VICTAULIC  
FITTING

4X BASE ANCHOR (PROVIDED)  
FOR 1/2" CONCRETE ANCHOR  
BOLT (NOT PROVIDED)

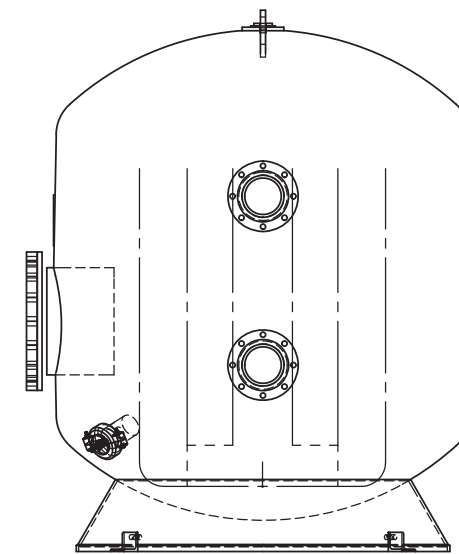



**INTERNAL PLUMBING VIEW**

SPECIFICATIONS	
MODEL	7-CT-0800
MATERIALS	TANK: HIGH STRENGTH FIBERGLASS, VINYL ESTER RESIN, REINFORCED CORROSION RESISTANT LINER INTERNAL PLUMBING: SCH 80 PVC <sup>1</sup> HARDWARE: 316 SS
PRESSURE	50 PSI WORKING PRESSURE WITH 4:1 SAFETY FACTOR
SEISMIC	ZONE 4
AGENCY	NSF/ANSI STANDARD 50

**NOTES**

- <sup>1</sup> DEL PROPRIETARY INTERNAL BAFFLING TO MEET NSF CONTACTING REQUIREMENTS.
- <sup>2</sup> LIFTING LUGS TO BE USED ONLY WITH EMPTY TANK.

ALL DIMENSIONS IN INCHES			APPROVALS:		DATE:		PROPERTY OF DEL OZONE  THIS DOCUMENT AND THE DATA DISCLOSED HEREIN IS PROPRIETARY. IT IS NOT TO BE REPRODUCED, USED, OR OTHERWISE DISCLOSED IN WHOLE, OR IN PART, TO ANYONE, WITHOUT WRITTEN CONSENT FROM DEL OZONE.			<div> DEL ozone™ advanced sanitation solutions</div>		TITLE: SPECIFICATION DRAWING, O3 CONTACT TANK, 800 GAL							
TOLERANCES:  .x ± .2 .xx ± .02 .xxx ± .010			DRAWN:  JBELL		7/29/2014							INTERPRET DRAWING PER ANSI Y14.5-1994		SIZE:		DWG. NO:		REV.	SHEET:
			ENGR. APPR: <div> Frank Martin</div> <div><small>Digitally signed by Frank Martin DN: cn=Frank Martin, o=DEL Ozone, ou, email=fmartin@delozone.com, c=US Date: 2019.04.05 08:52:04 -07'00'</small></div>									SCALE: 1:30 DO NOT SCALE DRAWING		B		4-1767-04		D	1 OF 1
ANGLES±1°																			
MATERIAL:			CHECKED:																
FINISH:			Q.A. APPR:																

ZONE	REV.	DESCRIPTION	ECN	DATE
	D	UPDATE WITH NEW MANWAY COVE AND DRAIN FITTING	ECN01708	03/22/2019
REVISIONS				

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---